Eagaton

T52P Business IP Phone

This easy-to-use color screen IP phone can help you improve work efficiency and ensure high-quality voice communication. Equipped with a 2.4-inch 320*240px color display with an adjustable backlight, it provides users with high-resolution graphics and a colorful experience. The T52P supports 2 SIP accounts, integrated 100M dual Ethernet ports, and PoE for easy network connection. And it supports HD voice technologies including wideband codec G.722 and opus for high-quality calls. In addition, it is easy to set up at 60 and 45 angles on a desk or 15-angle mount on the wall, meeting different application scenarios.

2 SIP | HD | POE | IPv6 | Opus | EHS

Product Features

- Enable high-quality 6-party conference, meeting theneeds of real-time multi-party communication andprovideing users with an efficient and convenientcollaboration experience.
- Supports remote registration, enabling interregional networking and simplifying cross locationdeployment of communication systems for businesses, significantly enhancing flexibility andoperational efficiency.
- New UI interface, easy-to-use web interface with clear guides, user-friendly design, and low maintenance requirements.
- Featuring advanced noise reduction technology,ensures crystal-clear voice transmission in noisy environments, significantly enhancing communication eficiency.
- Batch configuration and unified deployment enable rapid multi-device installation, significantly reducing users' deployment time and labor costs.
- Supports RJ9 headset port, compatible with communication terminals, provides stable analog audio connection.

Manufacturer: Beijing Eagaton Technology Co., Ltd.
Address: 6th Floor, Building B, No. 20 Heping Xiyuan, Chaoyang District, Beijing, China
www.eagaton.com

Eagaton

T52P Business IP Phone

Phone Features

LCD Screen	> 2.4" 320*240px color display with an adjustable backlight > 16-bit depth color
Function Keys	> 7 Function keys: message, headset, transfer, mute, redial, hands-free speakerphone, record > 4 Soft keys, 4 navigate keys, volume+/-
SIP Accounts	> 2 SIP accounts
Ethernet Ports	> 2*10/100M (Adaptive) > Support PoE(T52P only)
Other Ports	> 1 x handset port, 1 x RJ9 headset port

Audio Features

HD Voice	> HD handset, HD speaker
Audio Codec	> G.722, Opus, PCMA, PCMU, G.711(A/u), iLBC, G.729A/B, G.723, G.726-16/24/32/40
DTMF·	> In-band, RFC 2833, SIP info, RFC 2833+SIP info

Call Features

Basic Function	> Call hold, mute, DND, redial, auto answer, one-touch speed dial, hotline, SMS, call forward, call waiting, call transfer (attended/blind), paging, voice mail, anonymous call, anonymous call rejection, message waiting indicator (MWI)
Direct IP Call	> Supported
Phonebook	> 2000 records; phonebook search/import/export; XML/LDAP remote phonebook; black list
Call History	> 400 records; call history: all/missed/dialed/received
6 – Party Conference	> Supported

Configuration & Maintenance

Auto-provision	> TR069 (TR104/TR106) > FTP/TFTP/HTTP/HTTPS for Auto Provisioning > DHCP Option66
Configuration	> Supports web configuration > Factory reset, reboot > Packet capture, system log

Network

Network Safety	> SIP Related Features: – SIP v1 (RFC2543), v2 (RFC3261), NAT Traversal by STUN – SIP link mode: Proxy mode and peer-to-peer SIP link mode – Call server redundancy supported > Network Features: – Static IP and DHCP, IPv4、IPv6、Dual stack IPv4/IPv6; ARP/RARP; DNS/DNS SRV; LLDP/CDP/DHCP VLAN; L2TP, DSCP, QOS/HTTP/HTTPS; OpenVPN, ICMP > Time and Date Synchronization: SNTP, PBX, DHCP > Transport:UDP/TCP/TLS; RTP/RTCP/SRTP; VAD, CNG, AEC, AGC, PLC, AJB

Others

Physical Features	> New stand, wall mountable > AC/DC adapter, AC input: 100~240V, 50~60Hz > DC Output: 5V, 0.6A > Power consumption (PSU): 0.87~1.18W > Power consumption (PoE): 0.72~1.78W > Dimension (W x H x D): 165mm × 200mm × 47mm

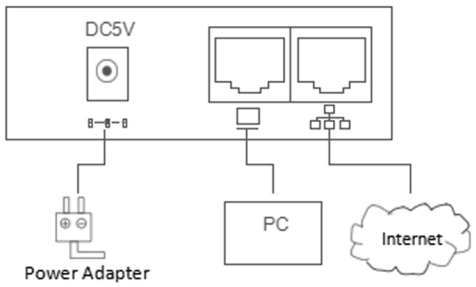

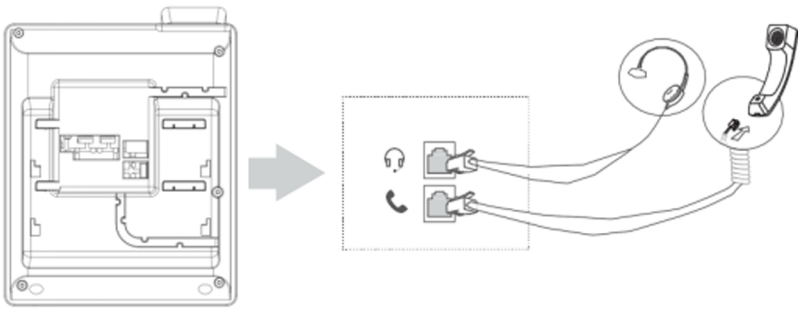

Manufacturer: Beijing Eagaton Technology Co., Ltd.
Address: 6th Floor, Building B, No. 20 Heping Xiyuan, Chaoyang District, Beijing, China
www.eagaton.com